



PIR Solar Panel LED Street Lights Timer Control 6-7 Meters Installation Height

Our Product Introduction

for more products please visit us on solarpanelstreetlight.com

Basic Information

- Place of Origin: China
- Brand Name: CO-SHINE
- Certification: CE RoHS
- Model Number: Model: DM-840
- Minimum Order Quantity: 20
- Packaging Details: Box 1 1140*390*120 mm lamp body Box 2 350*290*220mm(Supportor+Accessories)
- Delivery Time: 3-5 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram



Product Specification

- LED Lamp: 40W
- Solar Panel: 50W
- Battery: Li-ion Battery 3.7V 251WH
- Material: Aluminium Alloy
- Charge Time(by Sun): 8-10hours (with Enough Strong Shine)
- Discharge Time: 10-12 Hours Per Night 5-7rainy Days
- Installation Height: 6-7meters
- Suggestion Distance: 25-30meters
- Highlight: commercial solar pole lights



More Images



Product Description

PIR Motion Sensor And Timer Control Solar LED Street Lighting 40W With High Efficiency Solar Panel

Product features

die casting aluminum alloy material for the profiles, with a good stereotype effect. prevent solar panels from sliding.

High quality 【Bridgelux 】 LED chip, 130-140lm/w, high brightness

efficiently imported silicon high efficiency special surface treatment

independent plastic battery box, overall waterproof, heat insulation and dustproof

Openable for controller replacement and openable for battery replacement


special aluminum material, with a good heat conduction

Time control and PIR sensor mode

Specification

Solar street light 40W		Model: DM-840	
Main Lamps material	Aluminium Alloy		
Solar panel	Max Power	50W	
Battery	li-ion battery	3.7V 251WH	
	LiFePO4 battery	3.2V 224WH	
LED	Led chip brand	Bridgelux from USA with high brightness	
	Lumen(LM)	4400 -4800LM equal to15W	
	CCT (k)	6000-7000k	
	Life Time	50000 hours	
Lighting Viewing Angle	140°×70°		
Working TEMP()	-20°~+60°		
Working Mode	1. Time Control Mode , 2.Sensing Mode , 3.Time Control + Sensing Mode (Switched by smart remote control)		
Charge time(by sun):	8-10hours (with enough strong shine)		
Discharge time	10-12 hours per night 5-7rainy days		
Certificate	CE/ROHS/IP66		
Packing	Product size	1031*315*206 mm	
	Packing size	Box 1:1140*390*120 mm(lamp body)	
		Box 2 :350*290*220mm(Supportor+Accessories)	
	Net weight	12kg	
	Gross weight	14kg	
Packing way	1sets/2carton		
Packs Containers	20ft container	435pcs	
	40gp container	839pcs	
Installation height	6-7meters	Suggestion distance	25-30meters

Details

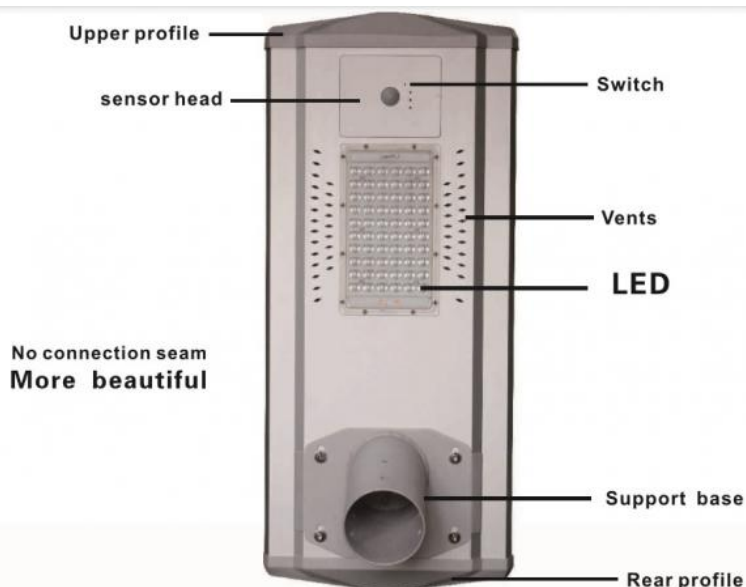



Application:

1. Major Roadways.
2. Residential Streets.
3. Pedestrian Walkways.
4. Parking Lots.
5. Expressway.
6. Docks and Piers.
7. Remote and Rural Locations.
8. High crime areas.
9. square sport grounds.
10. industrial plants and other advertising lights



Quality Control

Professional salt spray test:

The whole housing has been tested for 72 hours of salt spray test. It can be protected against rust for three years.

Other tests:

100% of the light will be tested and keep lighting for 24 hours to test its quality reliability , and we will also test its temperature after 24 hours' lighting.

Then after it is cool we again test 100% of the light to see if it still work well . Each light should pass all these QC procedures before shipping to customer

Delivery detail:

We ship goods by UPS/DHL/FEDEX/TNT express which takes 3~ 5 days to arrive, or by air cargo which takes about one week to arrive .

or by sea which takes about one month to arrive , depending on your actual requirements.

Our services:

1. For all your inquiries about us or our products, we will reply you in detail within 24 hours;
2. We own well-trained and passionate sales & after-sale services who can speak fluent English language;
3. We offer OEM services. Can print your own logo on product , can customize the retail box packing and other things.
4. We have very experienced R&D engineers and we have strong ability to do ODM projects.



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C