



## Soft LS Photo LED Studio Lights

### Our Product Introduction

for more products please visit us on [solarpanelstreetlight.com](http://solarpanelstreetlight.com)

#### Basic Information

- Place of Origin: China
- Brand Name: LS
- Certification: CE, ROHS
- Model Number: C-700RSV
- Minimum Order Quantity: 50PCS
- Price: Negotiation
- Packaging Details: Foam / inner box / outer carton, 1pc per inner box , 2pcs per outer carton , carton size 73.5x31x63cm
- Delivery Time: 15-30 working days
- Payment Terms: T/T, Western Union
- Supply Ability: 5000pcs per month



#### Product Specification

- Color Temperature: 3200-5600K (+ / - 300K )
- CRI: >90
- Working Voltage: DC7.4V-14.8V
- Power: Draw With AC Power Adapter Or Battery
- Model: C-700RSV
- Dimension: Round Of 52cm In Diameter
- Highlight: tv studio light



#### More Images



## Product Description

### Soft LS Photo LED Studio Lights With Standard Color Temperature

LS LED Studio lights C-700RSV, Ultra slim and soft, with standard color temperature and high CRI

### Product Description

LS LED Studio lights C-700RSV is a kind of new tech light which is different to the traditional LED light. The LEDs are in the lateral of the lighthouse and the beam is reflected from the inside layer of the diffusion material. The beam is so soft people can look directly to the light with no harm to the eye. And C-700RSV is the Bi-color version variable from 5600K to 3200K and illuminance change from 100% to 10%. The light is AC powered with external AC power adapter or DC powered with the included SONY type F series batteries of the SONY V type battery (it is not included) in the light) via the V mount on the light.


### Specifications

Model No.	C-700RSV
Illuminance	1065 Lux/m
Beam angle	75 degree
Color temperature	3200k-5600K ( + / - 300K)
CRI	>90
Continuous working time	Approx 1.6 hrs
Output power	60W real power drawing
Working Voltage	DC 14.8V - 16.8V
Battery type	Rechargeable lithium battery of 6600mAH Sony type NP-F series
Battery lifetime	Charge and discharge for approx 500 times
Battery recharging time	Approx 8 -10 hrs
Dimension	520mm in diameter, 50mm thickness
Weight	2.85kgs
Accessories	2pcs batteries, Battery charger, charger adapter, AC power adapter, Carrying case

### What is included

- 1x light head C-700RSV
- 1x yoke
- 1x battery mount plate of SONY V type
- 2x batteries of Sony type NP-F series, 6600mAH
- 1x dual battery charger
- 1x charger adapter
- 1x AC power adapter
- 1x power cord
- 1x manual
- 1x carrying case

### Name of the parts

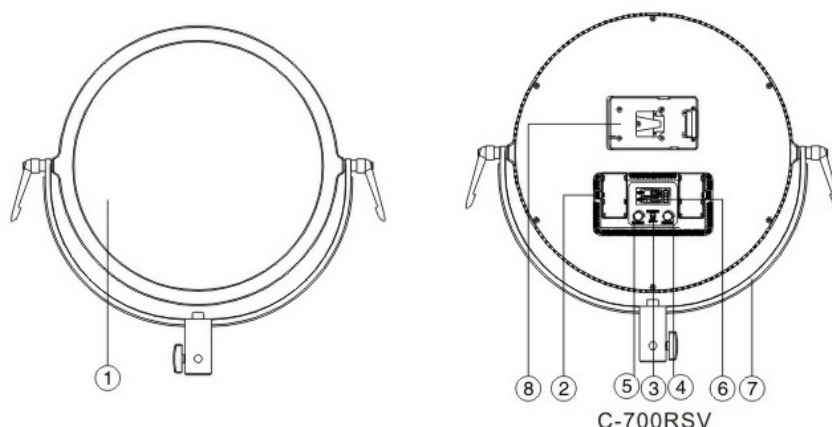

- 1 Front diffuser panel
- 2 Battery release button
- 3 DC input
- 4 Power & Brightness dimming knob

- 5 CT dimming knob
- 6 LCD screen
- 7 yoke
- 8 Sony V type or Anton Bauer battery plate

More pics with for Color temperature in 3200K, dimmable from 100% to 10%





**SOLAR LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD**



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C