




Four Feet 360° LED Studio Lights RGB Tube Light Color Temperature Adjustable 2800 - 10000K

Our Product Introduction

for more products please visit us on solarpanelstreetlight.com

Basic Information

- Place of Origin: China
- Brand Name: LS
- Certification: CE, RoHS
- Model Number: HS-T4X
- Minimum Order Quantity: 20
- Price: Negotiation
- Packaging Details: 2 pcs per cartons
- Delivery Time: 7-45 work days
- Payment Terms: T/T
- Supply Ability: 500pcs per month

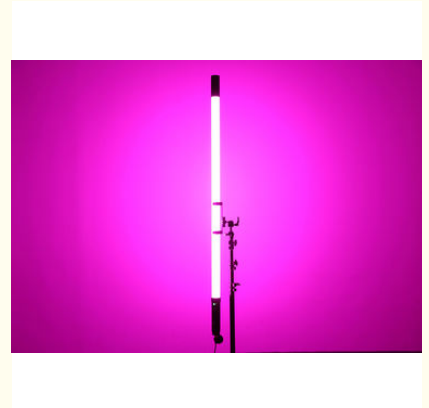


Product Specification

- Product Name: LED Scene Light
- Model No.: HS-T4X
- Material: Aluminum Alloy
- Protection Level: IP20
- Working Temperature: -20~40
- Beam Angle: 360°
- Light Source: LED
- LED Life Time: 50000 Hrs Approx
- Highlight: photography studio light



More Images



Product Description

FOUR FEET 360° DEGREE RGB TUBE LIGHT 60W LED SCENE LIGHT with DMX512

Product Specifications

Model	HS-T4X
SIZE	ø5X119 CM
Beam Angle	360°
Dimming	10-100% continuously dimmable
White Light Color temperature	2800k-10000k +/-200K
CRI & TLCI	CRI: 93-98, TLCI: 95-97
Weight	1.58 Kg (without power adapter)
Power input	AC100-240V, 50/60HZ, DC13-17V
Power output	60W


Standard set Included

- 1x light HS-T4X
- 1x AC power adapter (15V, 90W)
- 1x AC Power cord
- 1x Holder with Ball Head
- 1 x Carrying Bag
- 1 x Instruction Manual



Accessories for choice

- Barn Door
- Multi-connected holder

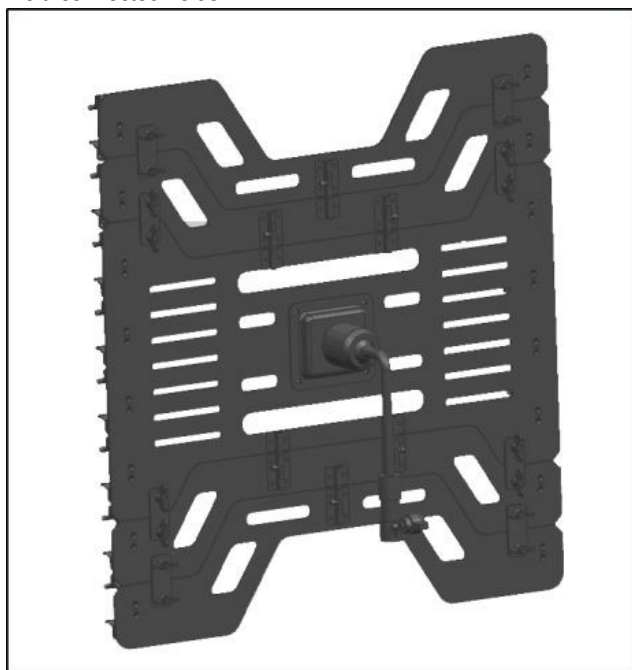

Product Characteristics

The TubeLite is a full-color 360° tube light that provides soft, clean light where other lights won't fit. The metal frame design allows for better heat dissipation increasing the lifespan of your light. The RGBWT LED design provides full 360° color selection and white light adjustable from 2800K to 10000K.

1. Composed of ultra bright chip LEDs with a lifespan of up to 50,000 hours. These LEDs have a standardized color temperature with a CRI 93-98 and TLCI 95-97.
2. 360° of bright, soft light is created using a unique 360° arc diffusion surface.
3. The design includes an all-aluminum frame for better heat dissipation to help ensure a long product life.
4. The light can be powered by wall power with the included AC power adapter or with the optional battery handle making it great for location work.
5. 0-360°color selection (RGB+WT color gamut).
6. Flicker-free and uniformly dimmable from 10%-100% due to the PWM integrated design.
7. Color temperature adjustable from 2800K to 10000K.
8. The LCD screen displays real-time data for color temperature, brightness and others.

[HS-T4X Illuminance]

Color temperature Distance Illuminance Distance	2800K	3200K	5600K	1000K
0.5 M	948 Lux	980 Lux	1039 Lux	1000 Lux
1 M	393 Lux	395Lux	426 Lux	400 Lux
2 M	144 Lux	144 Lux	158 Lux	148 Lux

Color temperature Distance Illuminance Distance	RED	GREEN	BLUE	WHITE	TUNGSTEN
0.5 M	413 Lux	1195 Lux	229 Lux	1027 Lux	869 Lux
1 M	170 Lux	487 Lux	86 Lux	405 Lux	352 Lux
2M	64 Lux	179 Lux	31 Lux	149 Lux	158 Lux

Parts Diagram

A: 360° luminous surface
D: Power ON/OFF button
G: Function button of Selection

B: DMX Socket
E: Decrease/Function button left
H: LCD display screen

C: 4pin XLR socket
F: Increase/Function button right

Cautions:

1. Do not disassemble or modify the light, or solder the LEDs by non-professionals.
2. Do not touch or operate with wet hands; doing so may cause electric shock.
3. Do not operate in environments near flammable gasses or volatile liquids as this may increase the risk of explosion/fire.
4. Do not operate in enclosed spaces where heat buildup can be extreme, such as inside a car on a sunny day. The increased heat may cause premature failure of the lighting unit.
5. Do not damage, disassemble, twist or modify the power cord as it may increase the risk of fire or electric shock.
6. Do not place under heavy objects.
7. Keep the light clean with a soft, dry cloth.
8. ONLY use the provided AC power adapter. Using other AC power adapters may result in damage to your light.
9. Avoid impact to the LCD screen.
10. Avoid dust and debris buildup as this will affect the luminance and color temperature.
11. When using the accessories, please make sure they are installed securely in place to avoid damage.

Warranty:

The LED light is guaranteed for 12 months.

SOLAR LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C