



White 6 Inch LED Recessed Downlights Die - Cast Aluminum 18watt AC100V - 230V

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: MINSSENS
- Certification: CE ROHS DLC ETL
- Model Number: MS-DWL-18W
- Minimum Order Quantity: 100pcs
- Price: Negotiable
- Packaging Details: Standard export packaging or customize
- Delivery Time: 5-10 work days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000000pcs per month



Product Specification

- Lamp Power: 18W
- Input Voltage(V): AC100-265V
- Lumens: 1600-1800lm
- PF: >0.95
- Beam Angle(°): 120
- Lamp Body Material: Aluminum Alloy
- Color Temperature: 2800~7000K
- Cut: 150-155mm
- Cover: Clear Or Frosted
- LED Light Source: Epistar SMD2835
- CRI: >80
- Warranty: 3 Years
- Highlight: led down lamp



Product Description

Die-Cast Aluminum 18w Led Downlight AC100V - 230V 6 Inch White Round Led Recessed

Downlight

Description

1. Epistar led,high efficiency ,up to 110lm/w.
2. Adopting good quality brand LED Driver in China
3. High power efficiency and power factor(PF>0.9)
4. High Quality Die-casting Aluminum shell, thicker heat dissipation, durability, Anti-corrosion
5. Male and female connector: easy to assemble and disassemble. With reflector ,lighting softly and no dark place
6. Passed CE&RoHS certification
7. Isolated power supply,it's more safe
8. Environment-friendly and no UV or IR radiation.
9. Extruded aluminum is good at heat dissipation,surface temperature usually stay below 65°
10. Wide range of available operating voltage and low consumption.

Parameter

Power	18W
Color temperature	Warm white: 2800-3200K
	Natural white: 4000-4500K
	Cool white: 6000-6500K
LED chip quantity	1pcs
LED II lumination	2000LM
LED chip	Epistar led chip
Input Voltage	AC100V~240V
FrequencyRange	50Hz~60Hz
Power Factor	>90%
Power Efficiency	>87%
product Size	Φ170mm
Cut	Φ150-155mm
Led Luminous Efficiency	100LM/W
Led Initial Flux80	2000LM
lamp's Efficiency	100%
Color Rendering Index	>81%
Light Distribution	round/square
Light Design	LED+Reflective Cup
Working Temperature	-40~+55 degree
IP Grade	IP33
Net weight	0.24KG
Power cable	2×0.75mm ²
color of housing	white,silver
certificate	CE ROHS
Packing details:	50pcs/ctn


Applications

Residential Buildings, Home
 Office, Meeting Room
 School, Library
 Factory, Warehouse
 Hotel, Casino
 Parking Garage
 Hospital
 Commercial Center
 Supermarket, Shopping mall,anywhere you want

Packaging

Standard export packaging or customized according to customer requirements

Details

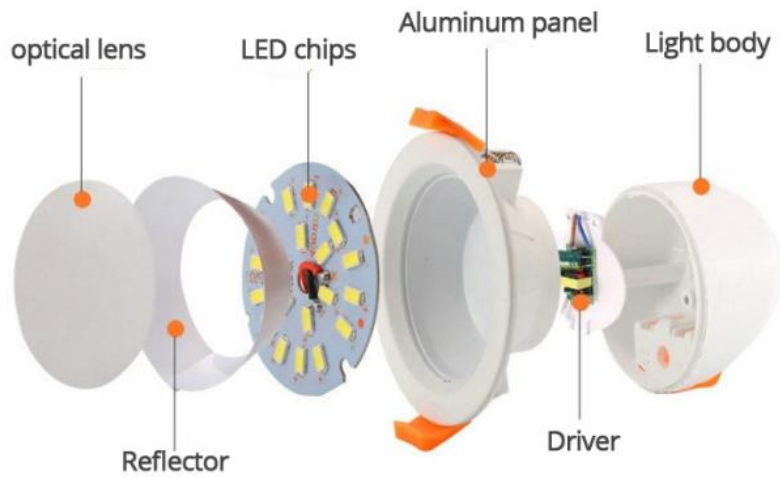

SOLAR LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C

