



Low Profile Recessed Dimmable LED Downlights High Brightness 80% Energy Saving

Our Product Introduction

for more products please visit us on solarpanelstreetlight.com

Basic Information

- Place of Origin: China
- Brand Name: MINSSENS
- Certification: CE ROHS DLC ETL SAA
- Model Number: MS-DWH-30W-200W
- Minimum Order Quantity: 10pcs
- Price: Negotiable
- Packaging Details: Standard export packaging or customize
- Delivery Time: 5-10 work days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000000pcs per month



Product Specification

- Lamp Power: 30w 40w 50w 60w 80w 100w 120w 150w 180w 200w
- Input Voltage(V): AC100-305V DC12V 24V 36V
- Lumens: 90-120lm/W
- Size: 5" 6" 8" 10" 12"
- Beam Angle(°): 30° 45° 120° 60° 90° 120°
- Lamp Body Material: Fins Aluminum
- Color Temperature: 2800~7000K
- Dimension: 175-300mm Diameter
- Cut: 140-285mm
- Cover: Clear Or Frosted
- Highlight: led down lamp



More Images



Product Description

30w 40w 50w 60w 80w 100w 120w 150w 180w 200w Dimmable LED Recessed Downlights

Dimmable 6" 8" 10" 347V 277V

Features

1. 30W-200W are offered
2. Replace /OSRAM/ Metal Halide Downlight up to 400W .
3. Sizes available :5"-12" Diameter.
4. Suitable Heights: 10M-40M
5. High quality Cree led chip 130lm/W.
6. Unique product design ,up to 80% energy saving, low power consumption ,low heat emission and high brightness.
7. Dimmable and non-dimmable are both available.(0-10V or 1-10V dimmable)
8. Go Green ,energy saving ,low carbon environmental protection ,no mercury pollution.
9. Instant start up , silent operation and flicker-free,effectively protecting the eyes.
10. Designed as a direct retrofit to most LED Down Light ,5 inch ,6 inch ,8 inch ,9 inch, 10 inch and 12 inch diameter are available.


Specification

Power	30W-80W 100W-200W				
Downlights Dimension	5" 6" 8" 10" 12"				
Input voltage	AC100-305V DC12V 24V 36V				
PF	>0.9				
Light Emitting Angle	30° 45° 120° 60° 90° 120°				
LED luminous Efficiency	90-120lm/W				
Color Rendering Index	80 Ra				
Dimension(mm)	175*120	200*120	225*130	270*140	300*180
Cut out size(mm)	140-150mm	170-180	200-215	240-250	260-280
Weight	0.6kg	0.7kg	1.0kg	1.2kg	1.3kg
IP Grade	IP54				

Details

Using high quality CREE LED chip, 120-130lm/w high brightness.
 Power-saving, best aluminum alloy fin heat sink for high effective cooling operation.
 Both dimmable and non-dimmable are available (0-10V or 1-10V dimmable).
 Modern and brandnew style, unique in market.
 User-friendly anti-flicker design, instant start up With reflective cup and milkly white lens for option.
 High power, large dimensions, light weight, easy installation.
 Widely applied to commercial premises places, hospital, hotel, etc.



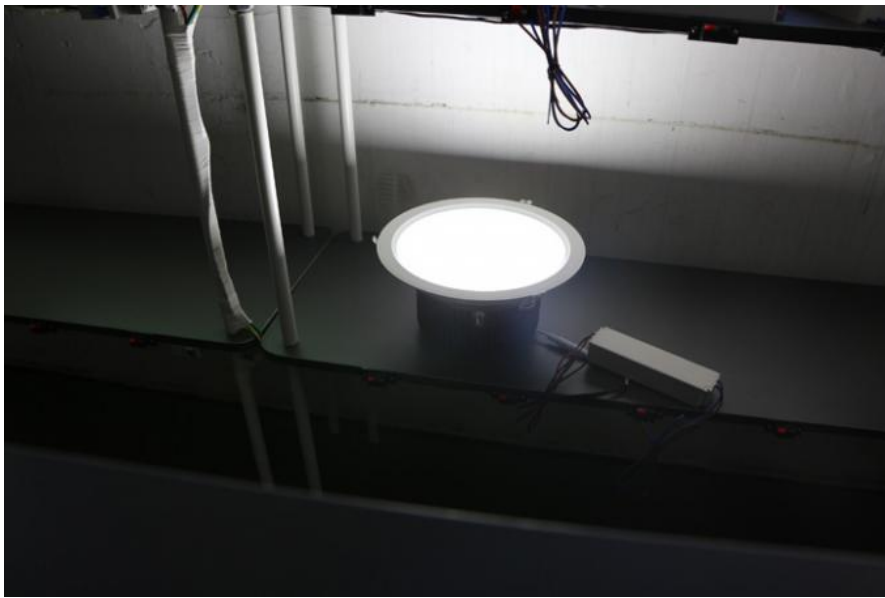

Aging test



Applications

Indoor lightings, Retrofit lightings, low bay lightings, office, household lightings, shopping malls, stores, super markets, ect



Packaging

Standard export packaging or customized according to customer requirements

SOLAR LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C