



Shallow Depth LED Recessed Downlights , 100W LED Recessed Ceiling Lights 5" 6" 8" 10" 12"

Our Product Introduction

for more products please visit us on solarpanelstreetlight.com

Basic Information

- Place of Origin: China
- Brand Name: MINSSENS
- Certification: CE ROHS DLC ETL SAA
- Model Number: MS-DWH-30W-200W
- Minimum Order Quantity: 10pcs
- Price: Negotiable
- Packaging Details: Standard export packaging or customize
- Delivery Time: 5-10 work days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000000pcs per month



Product Specification

- Lamp Power: 30W-200W
- Input Voltage(V): AC100-305V DC12V 24V 36V
- Lumens: 90-120lm/W
- Size: 5" 6" 8" 10" 12"
- Beam Angle(°): 30° 45° 120° 60° 90° 120°
- Lamp Body Material: Fins Aluminum + Lens
- Color Temperature: 2800~7000K
- Items: LED Recessed Downlight
- Installation: Recessed
- Applications: Hall, Large Conference Room
- Highlight: led down lamp



More Images



Product Description

5" 6" 8" 10" 12" High Power LED Recessed Downlights 100W For Conference Hall , Lobby 10m -

40m Installation Height

Features

1. Unique fin LED downlight, light weight, small size, not easy to deformation, thermal performance, low transportation costs.
2. The use of the United States Section sharp light source, the use of unique multi-chip integrated module light source design, with high thermal conductivity, low light failure, light color pure, no ghosting and so on.
3. Downlight hole size optional 5 inch 6 inch 8 inch 10 inch 12 inch.
4. Using high quality CREE LED chip, 120-130lm/w high brightness
5. Power-saving, best aluminum alloy fin heat sink for high effective cooling operation
6. Both dimmable and non-dimmable are available (0-10V or 1-10V dimmable)
7. Modern and brandnew style, unique in market
8. User-friendly anti-flicker design, instant start up
9. With reflective cup and milky white lens for option
10. High power, arge dimensions, light weight, easy installation
11. Widly applied to commercial premises places, hospital, hotel, etc.

Specification


MS-DWH-30W	30W	3050	5" 6" 8" 10" 12"	5inch:140-150mm 6inch:170-180mm 8inch:200-215mm 10inch:240-250mm 12inch:260-275mm
MS-DWH-40W	40W	4015		
MS-DWH-50W	50W	5215		
MS-DWH-60W	60W	6300		
MS-DWH-80W	80W	8435		
MS-DWH-100W	100W	11532		
MS-DWH-120W	120W	13005		
MS-DWH-150W	150W	16225		
MS-DWH-180W	180W	18652		
MS-DWH-200W	200W	21568		
Input Voltage			AC100V~305V	
Frequency Range			50Hz~60Hz	
Total Harmonic Distortion			≤ 9 %	
Power Factor			>0.98	
Power Efficiency			>87 %	
Working Voltage			DC30~36V	
Color Rendering Index			Ra>80	
IP Grade			IP54	
Material			Aluminum Alloy	
Led Luminous Efficiency			95-120Lm /W	
lamps Efficiency			>91 %	
Illuminance Uniformity			>0.6	
Color Temperature			2700-7000K	
Light emitting angle			30° 45° 120° 60° 90° 120°	
Junction Temperature			≤80	
Working Temperature			-40 ~ +55	
Storage Temperature			-25 ~ +65	
Working Lifespan			50000H	

Details

- 1.30W-200W are offered
- 2.Replace /OSRAM/ Metal Halide Downlight up to 400W .
- 3.Sizes available :5"-12" Diameter.
- 4.Suitable Heights: 10M-40M




chip typical light distribution curve

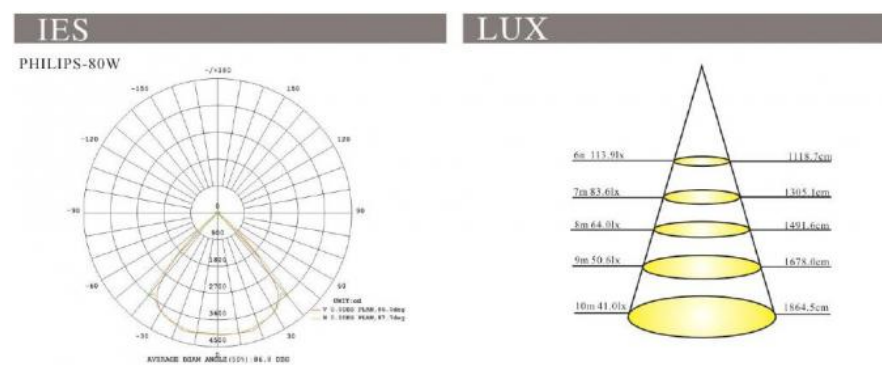


Installation

Open hole embedded installation

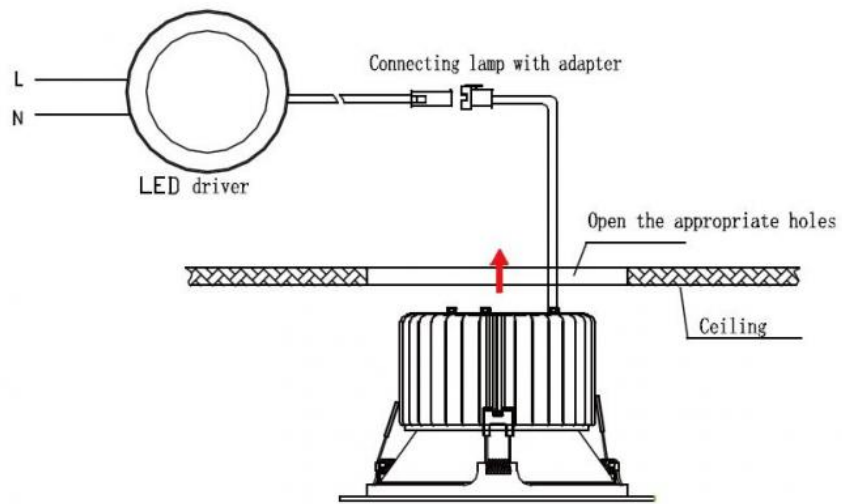

Applications

1. Hotel, hotel, hotel lighting
2. Museums, stadium lighting
- 3 large shopping malls, supermarket lighting
4. Hou hall, bus terminal, airport, subway station lighting

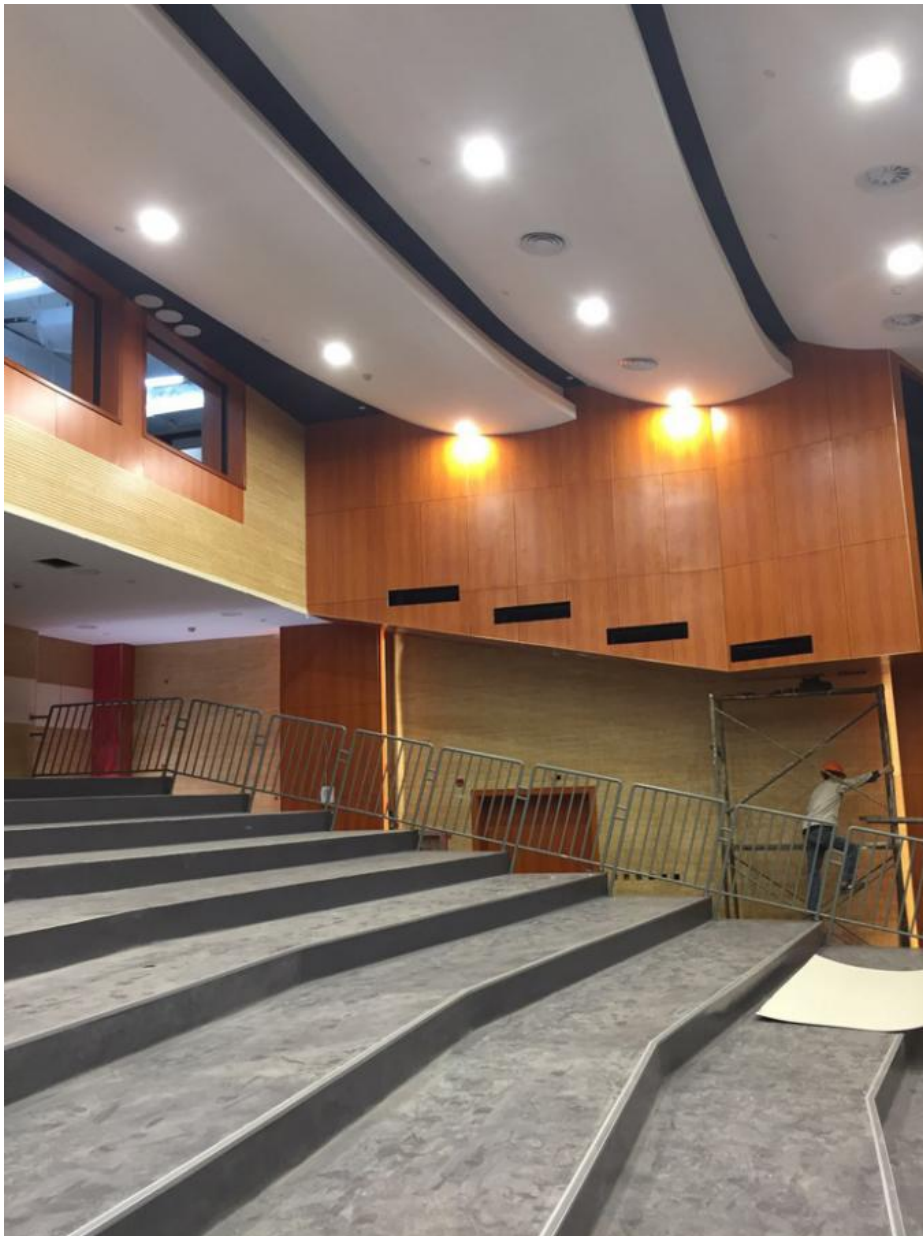

Packaging

Standard export packaging or customized according to customer requirements.

SOLAR  LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD



17733330123



miclecleanmo@gmail.com



solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C