



Cutting Length LED Neon Rope Light

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: TL
- Certification: CE, ROHS, UL
- Model Number: TL-SW08A/B
- Minimum Order Quantity: 1pc
- Price: Negotiable
- Packaging Details: Carton
- Delivery Time: 7-15 workdays
- Payment Terms: T/T
- Supply Ability: 5000m/day



Product Specification

- Material: Silicon
- Standard Length: 5 Meters(16.4ft)/10m(32.8ft)
- Beam Angle: 150°
- Input Voltage: 12V/24V
- Power: 14w/m
- Color: White/red/green/blue/yellow /pink/purple
- Waterproof: IP68
- Performance: Stable Reliability, UV And Yellowish Resistant
- Lifetime: 50000H
- Certification: UL CE ROHS
- Highlight: led rope light

Product Description

Mini Size 2.5cm Cutting Length Led Neon Flexible Light 12v 24v For Neon Sign

Application

Can be Widely used in building outline decoration lighting, KTV decoration lighting, Car decoration lighting, urban lighting and others decoration lighting.

Product features

Uniform&even light source with no LED "hotspots" and three-dimensional emitting.
More durable and flexible with 120mm minimum bending diameter.
Easy for transportation and installation.
Product can be fixed in the rugged place (smooth surface and bendable).
Beam angle: 150°.
Input voltage: 12VDC/24VDC.
Excellent lumen maintenance (3oz FPC).
12VDC product: maximum length 10 meters (32.8ft).
24VDC product: maximum length 15 meters (49.2ft).
Flexible cutting (the cut mouth sealed by silicone glue).
IP68.
table reliability and anti-UV.

Application data

Maximum length	10/15 meters (32.8/49.2ft)
Ambient temperature range	-25 ~ +50 °C
The temperature of module top	65 °C
Storage temperature range	-40 ~ +70 °C
Certification	CE/UL/ RoHS

Installation

U-type PC accessory to fix

Technical data

Product Name	Nominal voltage	Color temperature or Wavelength	CRI	Typ. Flux/meter(3.28ft)	Typ. Power/meter(3.28ft)
TL-SW08A/B(2835)	12/24 VDC	2700-5500 K	>75	850~1100 lm	12 W
TL-SR08A/B(2835)	12/24 VDC	620-625 nm	Red	300~350 lm	12 W
TL-SG08A/B(2835)	12/24 VDC	520-528 nm	Green	210~230 lm	12 W
TL-SB08A/B(2835)	12/24 VDC	465-470 nm	Blue	1100~1010 lm	12 W
TL-SY08A/B(2835)	12/24 VDC	590-596 nm	Yellow	300~310 lm	12 W

Tolerance range for optical and electrical data: ±15 %.


All value @ ta=25°.

Voltage tolerance range of the power supply: ±5 %.


Product 2D drawing

12VDC/24VDC product interior drawing


3 LEDs cut-able

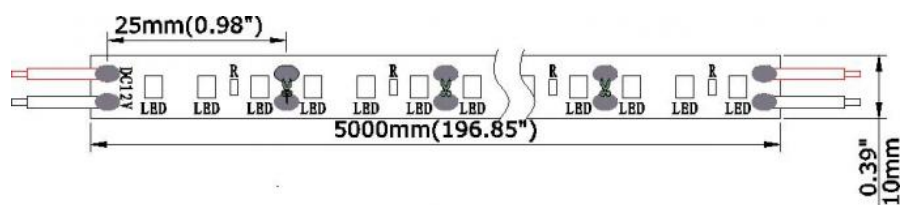


6 LEDs cut-able

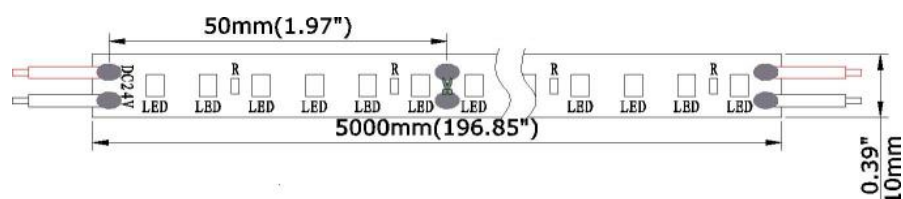


Product installation schematic diagram

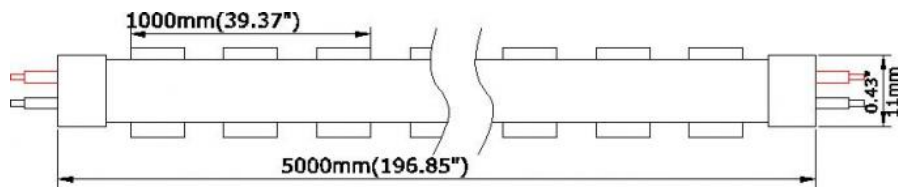

Product sectional drawing

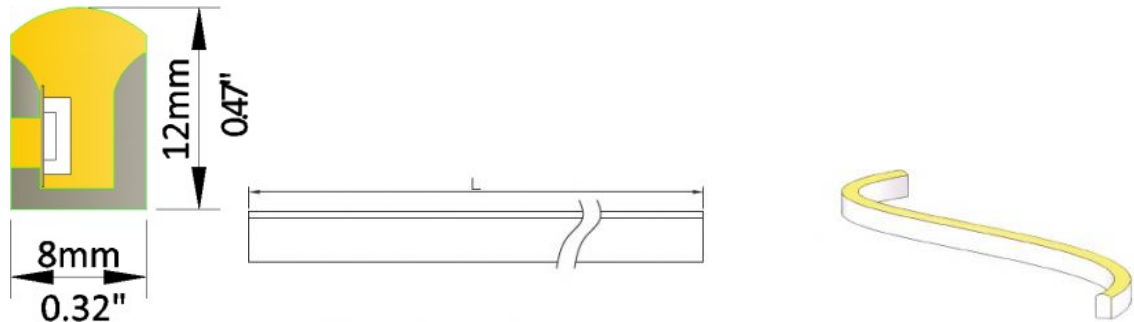


Product application

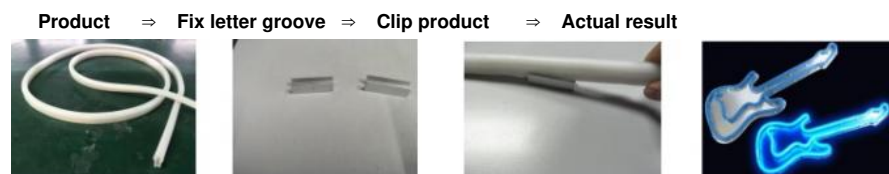

Connect two products




Bending direction



The maximum bending angle 360°

The minimum bending radius: 15mm (0.59 inches)

Light distribution

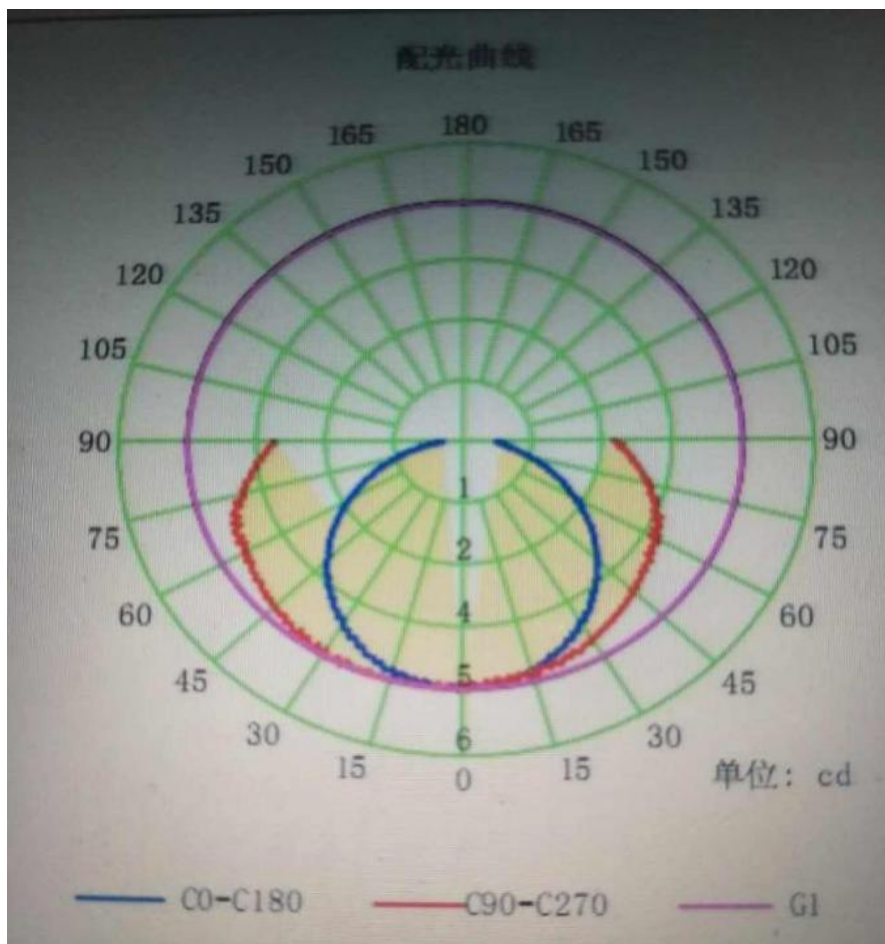

Packaging information

Product name	Product dimension (L*W*H)	Carton dimension (mm/inch)	Total length/carton	Gross weight (kg)
RCC0GX06A/B(2835)	5m*8mm*12mm (16.4ft*0.32"*0.47")	520*370*260 (20.5"*14.5"*10.2")	200m (656ft)	20

SOLAR LIGHT Beijing Silk Road Enterprise Management Services Co.,LTD

17733330123
 miclecleanmo@gmail.com
 solarpanelstreetlight.com

No 41, Dongsihuan Zhong Road, Chaoyang District, Beijing, 100025, P.R.C